

Kingwood™

Waterproof Laminate Flooring

A WORRY-FREE CHOICE FOR KIDS
AND PETS TO PLAY ON AGAINST VARIOUS
DAILY CONTAMINATIONS



The up-to-date surface treatment, beveled or rounded edges with water-proof seal, and highly swell-resistant black HDF core make Kingwood products not only moisture, scratch, and stain-resistant, but also flexible and forgiving to subfloor imperfections, indentation, and telegraphing.





Technical features and performance:

- >> **4inLook®** texture for one-stop beauty
- >> **SurfaceGuard®** provides lifetime protection
- >> **Pressed Bevel** for real wood looking
- >> **Large install** without transition
- >> **TapFit® 5G Click** for easiest and fastest on-site job



A breakthrough of stability

With an innovative black HDF core whose swelling rate is lower than 10% and density is higher than 900kgs/m³, Kingwood product enjoys much higher resistance against water and is 60% more stable than standard laminate flooring.



Large install without transition

Dimensional stability makes it possible to be installed over 6,000 sf without transition.



A time-saving single installation step

TAPFIT locking system makes installation effortless. Just a tap on the end with no mess and no hassle.



SurfaceGuard® provides lifetime protection

Liquid overlay adds an extra layer of resistance to wear, scratch and stain resistance than the industry-leading rigid coatings. SurfaceGuard® adopts ultimate strong surfaces with the abrasion rating of AC3, AC4 and AC5.



Product structure

Waterproof Laminate Flooring

Liquid Overlay

Surface wear layer protects against scratches, scuffs and stains for a long-lasting new floor look and performance. It can be appropriate for all residential / light commercial areas

Decor Paper

Designer-inspired visuals create a true-to-nature appearance.

Highly Water-resistant HDF Core

Prevents telegraphing of minor subfloor imperfections Impact resistance and more substantial feel
Optimum in sound absorption.
Superior Dimensional stability with exclusive composition

Balance Layer

Providing balance on dimensional stability and moisture-resistant.

Thanks to its slim but extra outstanding physical properties, Kingwood creates endless possibility for new generation flooring design and development.



KITCHENS



BATHROOMS



LAUNDRY ROOMS



OFFICES



RESTAURANTS



















SHOPS

Size Variety

Waterproof **Laminate Flooring**

**More
Choices**

Kingwood products mostly come in plank looks whose appearance is as compelling as their performance.

Appearance	Size	Thickness
	2260x194mm 2260x236mm	  
	1830x195mm (RL)	  
	1518x194mm 1518x236mm	  
	1218x194mm 1218x236mm	  



Super anti-scratch
to a worry-free life daily



Incredible resistibility
to impacts



Wet Mops and
sanitizers friendly

Waterproof Laminate Flooring




Utter resistance to the daily abuse of liquid

installation

Waterproof Laminate Flooring

Applications	Suitable
Dry & Level-Interior floor	✓
Wet & Level -Interior floor	✓
Saunas rooms	✗
Exterior areas	✗

Pattern recommendation

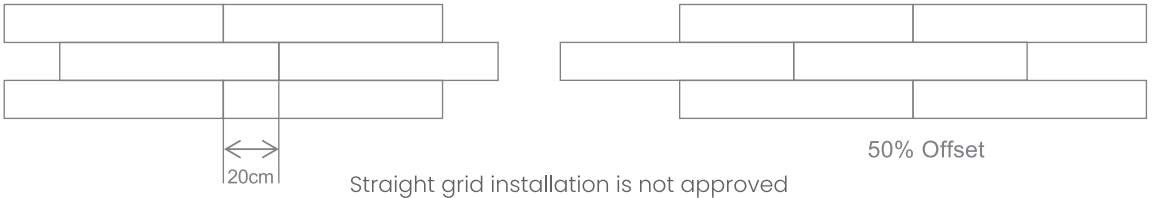

Notes

When install the floors, and extra 5-10% cutting allowance is required both for the installation and any potential future repairs, inspect all flooring for damage before and through installation in optimal lighting. Do not install flooring with visible defects. Avoid long-acting exposure to direct sunlight and excessive temperatures.



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



STYLISH



SCRATCH-RESISTANT



FIRE-RESISTANT











SIMPLICLEAN



GEOHERMAL

Technical Features

Waterproof Laminate Flooring

Description	Standard	Symbol	Requirements	Result
Wear resistance	EN 13329		AC3 \geq 2000 revolutions; AC4 \geq 4000 revolutions; AC5 \geq 6000 revolutions	AC4
Thickness swelling	EN 13329		\leq 18%	9.1%
Dimensional variations after changes in relative humidity	EN 13329		\leq 0.9mm	$\delta l \leq$ 0.38mm $\delta w \leq$ 0.40mm
Impact resistance	EN 13329			Small ball: \geq 12N Large ball: \geq 750mm
Density	EN 323			940kg/m ³
Resistance to staining	EN 438			5 (groups 1 +2) 4 (group 3)
Resistance to cigarette burns	EN 438			4
Effect of a castor chair	EN 425		25000 cycles, no damage	No change in appearance or damage
Effect of furniture leg	EN 424		No visible damage	No visible damage
Fire resistance	EN 14041			Bf1-s1
Dynamic coefficient of friction	EN 14041		Dynamin coefficient offriction of \geq 0.30 when tested and shalld beclared as technical calss DS	DS
CE certification	EN 14041		Refer to standard below	Pass
VOC	Floor Score			Pass

Kingwood™

Waterproof Laminate Flooring

A WORRY-FREE CHOICE FOR KIDS
AND PETS TO PLAYON AGAINST VARIOUS
DAILY CONTAMINATIONS



✉ info@seahawk-bm.com

📍 Kuigi 2nd Road, No.6, 10th floor Office 1040,
Chancheng District, Foshan city, Guangdong
Province, China